

Features

- 4x Phase-cut dimming outputs
- 300W/channel
- Leading or trailing edge
- Compliant to IEC 62386-102 Ed 2.0
- Compatible with DALI devices
- LED indicators for dimmer status
- Suitable for distribution board mounting on standard DIN rail



DALI device

Fully DALI compliant and compatible



Over-voltage

Protected against DALI over-voltage conditions

4x


Phase-cut

Comes with 4x phase-cut dimming



Insulated

Reinforced insulation between DALI and mains supply

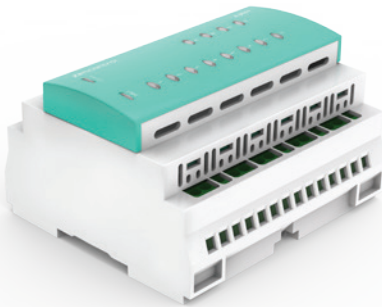


Product range

Order code	Description
zc-phd-4	DALI 4x Phase-cut dimmer

Features

- 4x Phase-cut dimming
- 300W/channel
- Leading or trailing edge
- Compliant to IEC 62386-102 Ed 2.0
- Compatible with DALI devices
- Protected against DALI over voltage
- LED indicators for dimmer status
- Reinforced insulation between DALI and mains supply
- Suitable for distribution board mounting on standard DIN rail

Dimensions (mm)

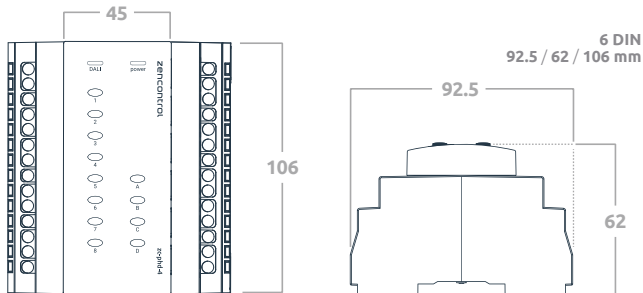

Specifications

Supply voltage	230 V ~ 50 Hz
Control system	DALI
DALI line current	2 mA
Wiring	1 - 4 mm ² Strip 6 - 7 mm
Operating temperature	0 to 55°C
Material	PC
Classification	Class II
Mounting	DIN rail (35 mm)
Ingress protection	IP20
Compliance standards	IEC 61347-2-11 IEC 60950-1 CISPR 15 CISPR 22 EN 55015 EN 55022 IEC 62386-102 Ed 2.0 EMC-2004/108/EC LVD-2006/95/EC

Accessories range

Order code	Description
zc-psu	DALI power supply

Notice

Requires external DALI power supply such as *zc-psu*