



### Features

- Up to 10 units per DALI line
- Automatic configuration of scene recall
- Models to suit 60 and 84 mm mounting centres
- Multiple faceplate finishes and colours available
- Customised control on DALI application controller
- Single button dimmer provides manual adjustments
- Customisable labels available for specific applications



### Powered by DALI

No additional supply means energy savings and simple installation



### DALI-2

For use with DALI-2 compliant application controller



### Integrated illumination

Configurable inbuilt LED status indicator for user convenience



### Scene recall

Plug and play control of scenes



## Product range


Order code	Description
<b>zc-scene-3scn</b>	Scenepanel to suit 60 mm wall mount assembled with hardware for three scenes
<b>zc-scene-c-3scn</b>	C-clip compatible scenepanel to suit 84 mm wall mount assembled with hardware for three scenes

## Features


- Up to 10 units per DALI line
- Automatic configuration of scene recall
- Designed for compliance to IEC 62386-301\*
- Models to suit 60 and 84 mm mounting centres
- Multiple faceplate finishes and colours available
- Customised control on DALI application controller
- For use with DALI-2 compliant application controller
- Single button dimmer provides manual adjustments

\* Pending publication of test sequences

## Dimensions

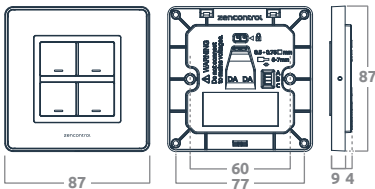

To suit 60 mm wall mount  
Dimensions 87 / 87 / 13 mm  
Mounting centres 60 mm

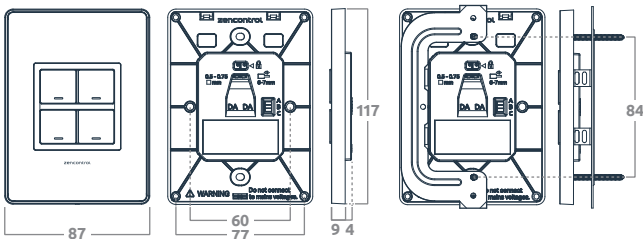

To suit 84 mm wall mount  
Dimensions 87 / 117 / 13 mm  
Mounting centres 84 mm

With c-clip

## Specifications

<b>Supply</b>	DALI
<b>Control system</b>	DALI-2
<b>DALI line current</b>	15 mA
<b>Wiring</b>	0.5 - 0.75 mm <sup>2</sup> Strip 6 - 7 mm
<b>Operating temperature</b>	0 to 45°C
<b>Material</b>	PC UV stabilised, ABS, 316 stainless
<b>Ingress protection</b>	IP20
<b>Compliance standards</b>	IEC 61347-2-11 CISPR 15 IEC 62386-301 EMC-2004/108/EC LVD-2006/95/EC

## Notice

- The switch must not be connected to any mains. It is powered directly from the DALI line.
- The DALI line is not SELV. It must be treated like LV mains and treated with the same precautions and wiring regulations.
- Compatible with zencontrol control system with a firmware version of 00.08.10 or above

## Configuration

- The Scenepanel presents on a DALI line as four control device instances.
- When used with zencontrol controllers the controller is automatically configured to send scenes 1 - 3 to the connected group.
- The power button is configured to act as a single button dimmer.
- Actual function is dependant on the configuration of DALI-2 application controllers connected to the DALI line.