


Recessed Down Light, IP44



Find me on the Web

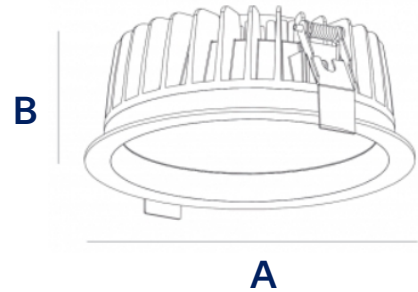

Lighting Data


LED	Bridgelux/Samsung
Lumens	1500lm / 2000lm
Color Rendering Index	>80
Correlated Color Temp.	3000K / 4000K / 6000K
Beam Angle	100°

Electrical Data

Power	15W / 20W
Voltage	220-240VAC
Frequency	50/60Hz
Power Factor	>0.9

Mechanical Data

Housing	Aluminium
Diffuser	Polycarbonate
IP Rating	IP44
Finish	White

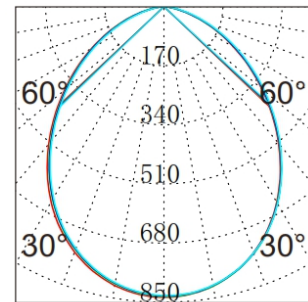

Driver

On-OFF

Emergency Kit

Available

Application

Indoor

Article ID	Power	Lumens	Correlated Color Temp.	Dimension	IP Rating
Astro 15	15W	1500lm	6000K	Φ160mm(A)x 70mm(B)	IP44
Astro 20	20W	2000lm	6000K	Φ190mm(A)x 74mm(B)	IP44