



### Features

- Multiple finishes available
- Up to 10 units per DALI line
- Models to suit 60 and 84 mm mounting centres
- Adjust colour temperature and brightness intuitively
- Customisable labels available for specific applications
- Customised control on DALI application controller
- Automatic control of 62386-209 devices (DT8)



#### Powered by DALI

No additional supply means energy savings and simple installation



#### DALI-2

For use with DALI-2 compliant application controller



#### Integrated illumination

Configurable inbuilt LED status indicator for user convenience



#### Tunable white

Plug and play control of tunable white fitting



## Product range


| Order code               | Description  |
|--------------------------|--|
| <b>zc-scene-a4-act</b>   | Scenepanel to suit 60 mm wall mount assembled with colour temperature hardware                   |
| <b>zc-scene-c-a4-act</b> | C-clip compatible Scenepanel to suit 84 mm wall mount assembled with colour temperature hardware |

## Features


- Multiple finishes available
- Up to 10 units per DALI line
- Adjust colour temperature and brightness
- Models to suit 60 and 84 mm mounting centres
- Customisable labels available for specific applications
- Customised control on DALI application controller
- Automatic control of 62386-209 devices (DT8)
- Designed for compliance to IEC 62386-301\*

\* Pending publication of test sequences

## Dimensions

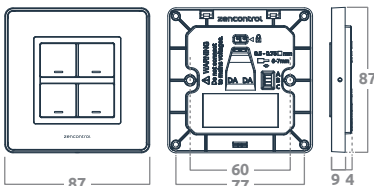

To suit 60 mm wall mount  
Dimensions 87 / 87 / 13 mm  
Mounting centres 60 mm

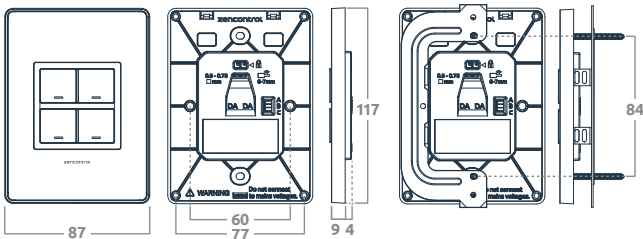

To suit 84 mm wall mount  
Dimensions 87 / 117 / 13 mm  
Mounting centres 84 mm

With c-clip

## Specifications

|                              |  |
|------------------------------|--|
| <b>Supply</b>                | DALI   |
| <b>Control system</b>        | DALI-2   |
| <b>DALI line current</b>     | 15 mA  |
| <b>Wiring</b>                | 0.5 - 0.75 mm <sup>2</sup><br>Strip 6 - 7 mm                                     |
| <b>Operating temperature</b> | 0 to 45°C  |
| <b>Material</b>              | PC UV stabilised, ABS, 316 stainless   |
| <b>Ingress protection</b>    | IP20   |
| <b>Compliance standards</b>  | IEC 61347-2-11<br>CISPR 15<br>IEC 62386-301<br>EMC-2004/108/EC<br>LVD-2006/95/EC |

## Notice

- The switch must not be connected to any mains. It is powered directly from the DALI line.
- The DALI line is not SELV. It must be treated like LV mains and treated with the same precautions and wiring regulations.
- Compatible with zencontrol control system with a firmware version of 00.08.10 or above

## Configuration

- This Scenepanel model presents on a DALI line as a single device with 4 push button instances.
- When used with zencontrol controllers the control system will automatically be configured to DT8 TC colour temperature commands to the control group by default.
- Actual function is dependant on the configuration of DALI-2 Application controllers connected to the DALI line.